





**Elmo  
Rietschle**  
A Gardner Denver Product

# G-BH1

## Data sheet 2BH1 600

### Side channel blower


CA<sup>®</sup> US



#### Performance curves

##### Vacuum operation

##### Compressor operation

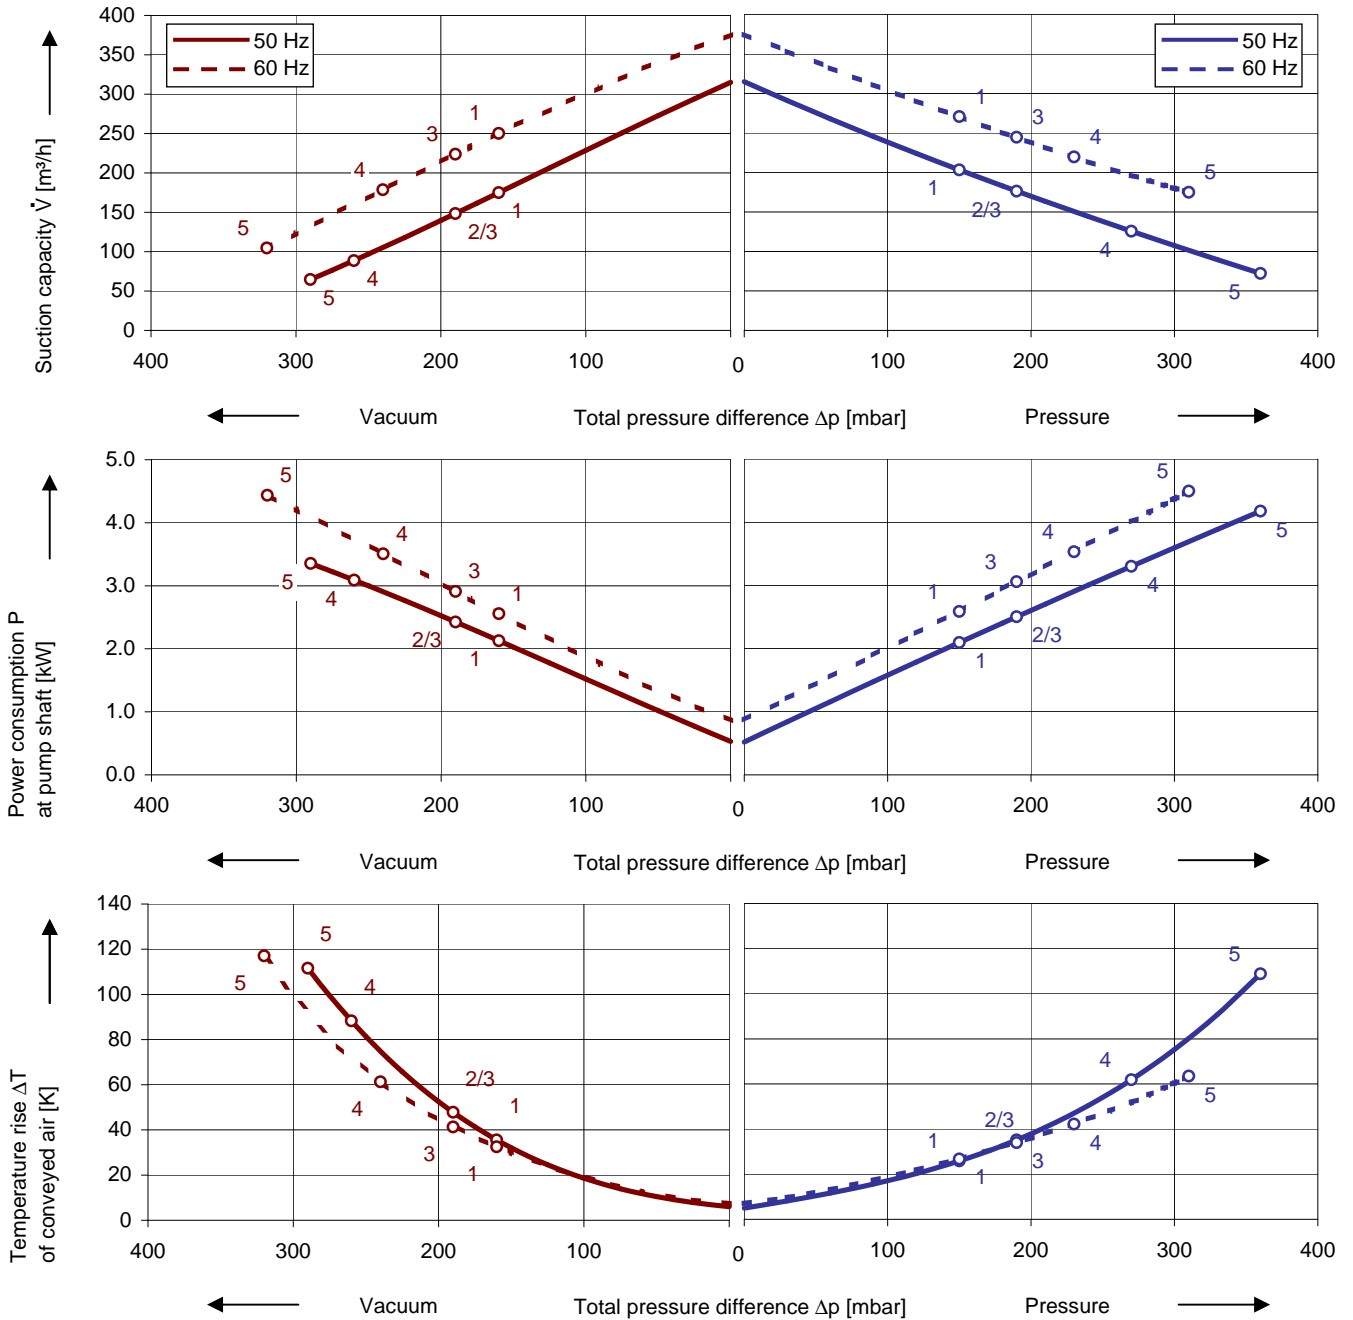

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of  $\pm 10\%$ . The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

Every G-BH pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F. The vacuum pumps / compressors are UL and CSA approved.

## Selection and ordering data

### Type 2BH1 600

No.	Fre- quency	Rated			Max. differential pressure <sup>2)</sup>		Sound pressure level <sup>3)</sup>	Weight Approx.	Order No.
		Voltage <sup>1)</sup>	Current	Power	Vacuum	Pressure			
		Hz	V	A	kW	mbar			
<b>3~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)</b>									
1	50	200 - 240 Δ / 345 - 415 Y	8.5 Δ / 4.9 Y	1.60	-160	150	69	26	2BH1600-7AH06
	60	220 - 275 Δ / 380 - 480 Y	8.8 Δ / 5.1 Y	2.05	-160	150	72		
3	50	200 - 240 Δ / 345 - 415 Y	9.7 Δ / 5.6 Y	2.20	-190	190	69	29	2BH1600-7AH16
	60	220 - 275 Δ / 380 - 480 Y	10.3 Δ / 6.0 Y	2.55	-190	190	72		
4	50	200 - 240 Δ / 345 - 415 Y	12.5 Δ / 7.2 Y	3.00	-260	270	69	34	2BH1600-7AH26
	60	220 - 275 Δ / 380 - 480 Y	12.6 Δ / 7.3 Y	3.45	-240	230	72		
5	50	345 - 415 Δ	9.0 Δ	4.00	-290	360	69	42	2BH1600-7AH37
	60	380 - 480 Δ	9.0 Δ	4.60	-320	310	72		
<b>3~ 50/60 Hz, IP55, Insulation material class F, UL 507 and CSA 22.2 No 113 (certificate number E225239)</b>									
1	50	500 Δ	2.9 Δ	1.50	-160	150	69	26	2BH1600-7AC05
	60	575 Δ	2.95 Δ	1.75	-160	150	72		
3	50	500 Δ	4.5 Δ	2.20	-190	190	69	29	2BH1600-7AC15
	60	575 Δ	4.55 Δ	2.55	-190	190	72		
4	50	500 Δ	5.7 Δ	3.00	-260	270	69	34	2BH1600-7AC25
	60	575 Δ	5.8 Δ	3.45	-240	230	72		
5	50	500 Δ	7.5 Δ	4.00	-290	360	69	42	2BH1600-7AC35
	60	575 Δ	7.6 Δ	4.60	-320	310	72		
<b>1~ 50 Hz, IP55, Insulation material class F, with attached capacitor for cont. operation</b>									
2	50	230	12.8	2.20	-190	190	64	21	2BH1600-7AA11

- In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 460 V.
- Relief valves available for limiting differential pressure.
- Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance  $\pm 3$  dB (A).

All G-BH fulfil the 2006/42/EC (machinery) and 2006/95/EC (low voltage) directives and the EN 60034-1 norm "Rotating electrical machines".

The motors comply with EN 60 034-1 / -2 / -30 (IEC 60034) and thermal class F.

For three phase motors tolerances are +/-10% for fixed voltage motors and +/-5% for voltage range motors. Single phase machines are designed with a +/- 5% tolerance.

The frequency tolerance is +/- 2 % maximum.

## Other voltages

50 Hz	50 Hz voltage range	60 Hz voltage range	86 Hz (5000 rpm)	2BH1...-7.	□	□
<b>3~</b>						
-----	185 - 225 V Δ / 320 - 390 V Y	200 - 240 V Δ / 345 - 415 V Y	-----		H	1
-----	200 - 240 V Δ / 345 - 415 V Y	220 - 275 V Δ / 380 - 480 V Y	380 V Δ		H	6
-----	345 - 415 V Δ	380 - 480 V Δ	-----		H	7
-----	500 V Δ	575 V Δ	-----		C	5
<b>IE2 3~ <sup>5)</sup></b>	<b>3~ <sup>5)</sup></b>					
200 V Δ / 345 V Y	180 - 240 V Δ / 310 - 415 V Y	200 - 275 V Δ / 345 - 480 V Y	-----		P	1
500 V Y	450 - 550 V Y	520 - 600 V Y	-----		P	3
500 V Δ	450 - 550 V Δ	520 - 600 V Δ	-----		P	5
230 V Δ / 400 V Y	200 - 260 V Δ / 350 - 450 V Y	230 - 290 V Δ / 400 - 500 V Y	400 V Δ		P	6
400 V Δ / 690 V Y	350 - 450 V Δ / 610 - 725 V Y	400 - 500 V Δ / 690 - 725 V Y	-----		P	7

- Performance can differ if high efficiency motors are used. Please refer to corresponding data sheets.

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given do not constitute an obligation from our side to deliver as shown.

# Gardner Denver

Elmo Rietschle is a brand of Gardner  
Denver's Industrial Products Group  
and part of Blower Operations

er.de@gardnerdenver.com  
www.gd-elmorietschle.com

Gardner Denver Schopfheim GmbH

Roggenbachstraße 58  
79650 Schopfheim - Germany

Tel.: +49 7622 392-0  
Fax: +49 7622 392-300

Gardner Denver Deutschland GmbH

Industriestraße 26  
97616 Bad Neustadt - Germany

Tel.: +49 9771 6888-0  
Fax: +49 9771 6888-4000