



# G-BH 1 N

## Data sheet 2BH1 943


Side channel blower with IE3-motors



### Performance curves

#### Vacuum operation

#### Compressor operation

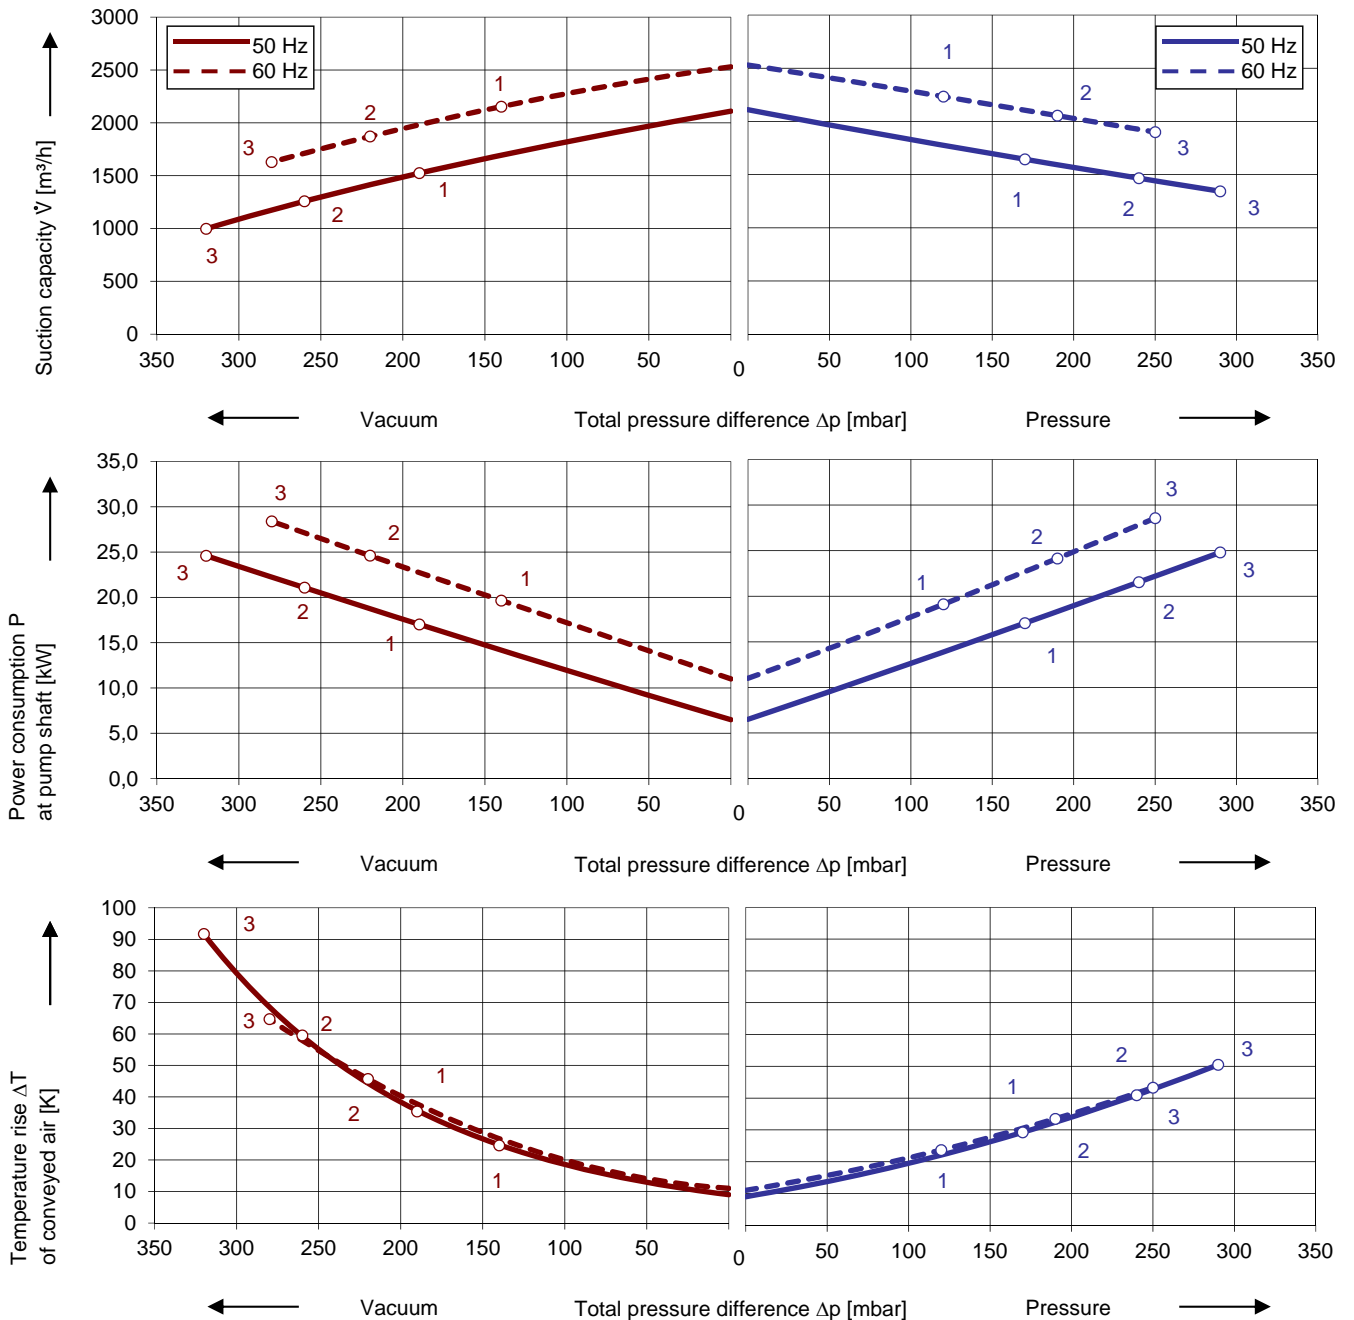

The performance curves are based on air at a temperature of 15 °C and an atmospheric pressure of 1013 mbar with a tolerance of  $\pm 10\%$ . The total pressure differences are valid for suction and ambient temperature up to 25 °C. For other conditions please get in touch with us.

Every G-BH pump can be used both as vacuum pump and compressor in continuous operation over the total performance curve range. The motors are available as standard in protection category IP 55 and insulation class F. The vacuum pumps / compressors are UL and CSA approved.

## Selection and ordering data

Type										
No.	Fre- quency Hz	Rated			Max. differential pressure <sup>2)</sup>		Sound pres. Level <sup>3)</sup> dB(A)	Efficiency class <sup>4)</sup>	Weight approx. kg	Order No.
		Voltage <sup>1)</sup>	Current	Power	Vacuum	Pressure				
		V	A	kW	mbar					
<b>IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1004 and CNA/CSA 22.2 No 68-09 (certificate number E225239)</b>										
1	50	190-210 Δ	63,1 Δ	17,3	-190	170	75	IE3	330	2BH1943-1GK21
	60	190-210 YY / 380-480 Y	72,2 YY / 36,1Y	19,9	-140	120	84	IE3		
	60	200 YY	72,2 YY	19,9	-140	120	84	NP		
2	50	190-210 Δ	76,2 Δ	21,3	-260	240	75	IE3	339	2BH1943-1GK31
	60	190-210 YY / 380-420 Y	87,4 YY / 43,7Y	24,5	-220	190	84	IE3		
	60	200 YY	87,4 YY	24,5	-220	190	84	NP		
3	50						75		349	2BH1943-1GK41
	60						84			
	60						84			
<b>IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1004 and CNA/CSA 22.2 No 68-09 (certificate number E225239)</b>										
1	50	220-240 Δ / 380-420 Y	54,9 Δ / 31,7Y	17,3	-190	170	75	IE3	330	2BH1943-1GK26
	60	220-240 YY / 380-420 Y	62,8 YY / 31,4Y	19,9	-140	120	84	IE3		
	60	230 YY / 460 Y	62,8 YY / 31,4Y	19,9	-140	120	84	NP		
2	50	220-240 Δ / 380-420 Y	66,3 Δ / 38,3Y	21,3	-260	240	75	IE3	339	2BH1943-1GK36
	60	220-240 YY / 440-480 Y	76,0 YY / 38,0Y	24,5	-220	190	84	IE3		
	60	230 YY / 460 Y	76,0 YY / 38,0Y	24,5	-220	190	84	NP		
3	50						75		349	2BH1943-1GK46
	60						84			
	60						84			
<b>IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1004 and CNA/CSA 22.2 No 68-09 (certificate number E225239)</b>										
1	50	500 Δ	25,4 Δ	44,0	-190	170	75	IE3	330	2BH1943-1GQ23
	60	575 Y	25,1 Y	19,9	-140	120	84	NP		
2	50	500 Δ	30,6 Δ	53,0	-260	240	75	IE3	339	2BH1943-1GQ33
	60	575 Y	30,4 Y	24,5	-220	190	84	NP		
3	50	500 Δ	35,2 Δ	61,0	-320	290	75	IE3	349	2BH1943-1GQ43
	60	575 Y	34,8 Y	29,0	-280	250	84	NP		
<b>IE3 3~ 50/60 Hz, IP55, Insulation material class F, UL 1004 and CNA/CSA 22.2 No 68-09 (certificate number E225239)</b>										
1	50	380-420 Δ / 660-725 Y	31,7 Δ / 18,3Y	17,3	-190	170	75	IE3	330	2BH1943-1GQ27
	60	440-480 Δ	31,4 Δ	19,9	-140	120	84	IE3		
	60	460 Δ	31,4 Δ	19,9	-140	120	84	NP		
2	50	380-420 Δ / 660-725 Y	38,3 Δ / 22,1Y	21,3	-260	240	75	IE3	339	2BH1943-1GQ37
	60	440-480 Δ	38,0 Δ	24,5	-220	190	84	IE3		
	60	460 Δ	38,0 Δ	24,5	-220	190	84	NP		
3	50	380-420 Δ / 660-725 0	44,0 Δ / 25,5	25,3	-320	290	75	IE3	349	2BH1943-1GQ47
	60	440-480 Δ	43,5 Δ	29,0	-280	250	84	IE3		
	60	460 Δ	43,5 Δ	29,0	-280	250	84	NP		

- In case of frequency converter operation the standard motor insulation system is suitable for converter input voltages up to 500 V.
- Relief valves available for limiting differential pressure.
- Measuring surface sound pressure level acc. to EN ISO 3744, measured with an equivalent unit at a distance of 1 m. The pump is throttled to an average suction pressure, with piping connected, but no relief valves fitted, tolerance ±3 dB (A).
- The motors according to NEMA MG1-12. NP=NEMA Premium; NEMA Premium includes IE3.

All G-BH match the 2006/42/EC (machinery) and 2006/95/EC (low voltage) directives and the EN 60034 norm "Rotating electrical machines".

Service factor (SF) and motor efficiency according NEMA MG1-12.

Voltage tolerances for three phase motors are +/-10%.

The frequency tolerance is +/- 2 % maximum.

## Motor for alternate voltages

Voltage range		Efficiency <sup>4)</sup>	cULUS 60 Hz	2BH1...-1. □ . □
50 Hz	60Hz			
<b>3~</b>				
200 VΔ	200 V YY / 230 VΔ / 400 VY		•	K 1
190-210 VΔ	190-210 VYY / 220-240 VΔ / 380-420VY		•	K 1
200 VΔ / 230 VΔ / 400 VY	230 V YY / 460 VY		•	K 6
190-210 VYY / 220-240 VΔ / 380-420VY	220-240 VYY / 440-480VY		•	K 6
475-525 V Y	550-600 V Y		•	Q 3
475-525 VΔ	550-600 VΔ		•	Q 5
400 VΔ / 690 V Y	460 VΔ		•	Q 7

Changes in particular of the quoted performance curve, data and weights may occur without prior notice. The data given does not constitute an obligation from our side to deliver as shown.

Elmo Rietschle is a brand of Gardner Denver

**Gardner  
Denver**

Your Ultimate Source for Vacuum and Pressure

**Gardner Denver Deutschland GmbH**

Industriestraße 26  
97616 Bad Neustadt - Germany  
Tel.: +49 9771 6888-0  
Fax: +49 9771 6888-4000

www.gd-elmoietschle.com • er.de@gardnerdenver.com

**Gardner Denver Schopfheim GmbH**

Roggenbachstraße 58  
79650 Schopfheim - Germany  
Tel.: +49 7622 392-0  
Fax: +49 7622 392-300